
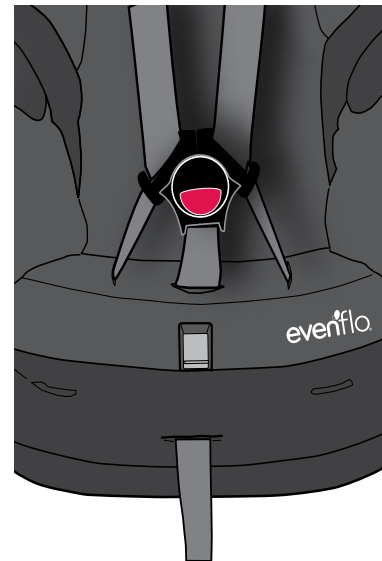
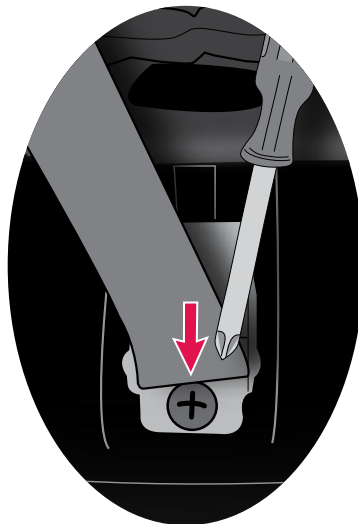


# Replacing the Screw on your Child Restraint's Central Front Adjuster (CFA)

*\* If your Child Restraint is installed rear-facing, you must first remove it from your vehicle.*

*You will need a handheld Phillips Head screwdriver.*

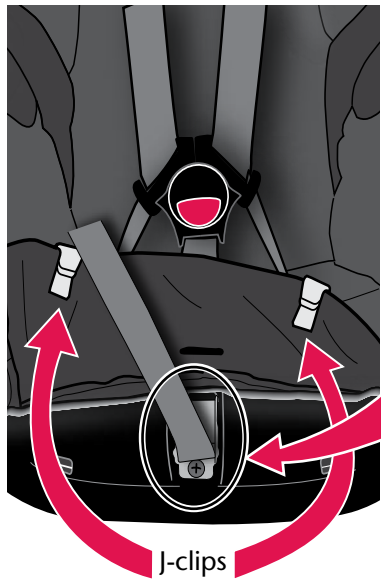

**1. Unhook two j-clips and pull seat pad off front of Child Restraint for better access to the CFA screw.**

**2. Remove Screw.**  
Remove screw with Phillips Head screwdriver. **Discard screw.**

**3. Attach New Screw.**  
Tighten new screw with Phillips Head screwdriver until snug. Make sure not to over tighten. **Do not use power tools.**

**4. Reconnect seat pad to front of Child Restraint.**